



PREFABRYKAT POŚREDNI 1:20

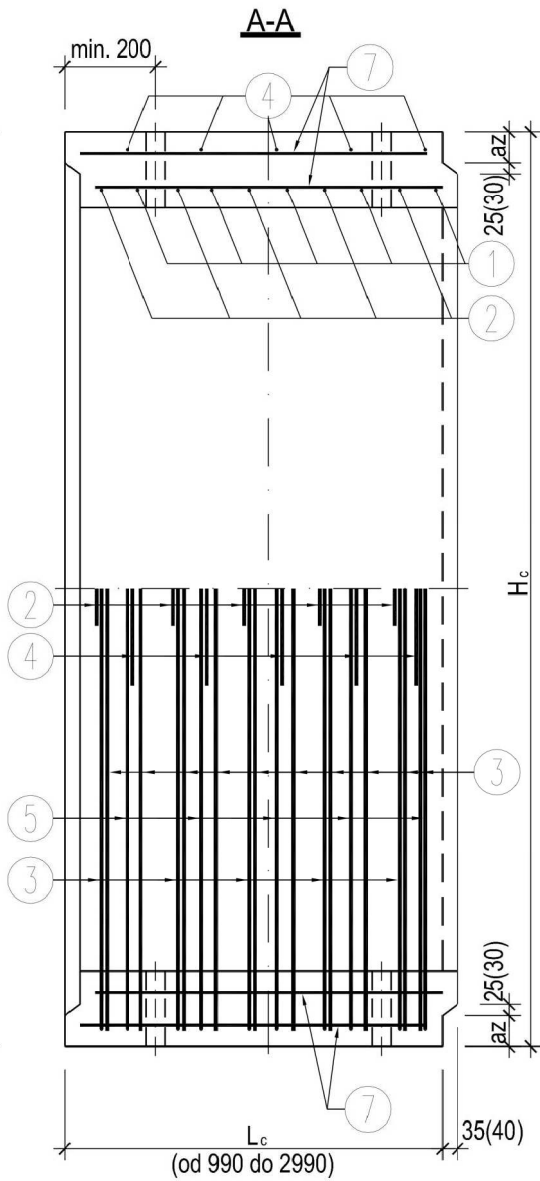


Wymiary geometryczne

Typ	B	H	B _c	H _c	g _s	g _p	az	s	m	z	V _b	G _b
	[mm]										[m³]	[t]
300x300	3000	3000	3500	3500	250	250	100	250	1900	400	3,37	9,10

PREFABRYKAT SKRAJNY 1:50

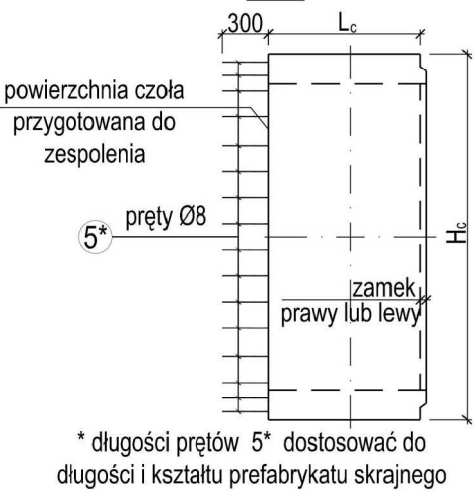



WIDOK ZAMKA W NAROŻU 1:20

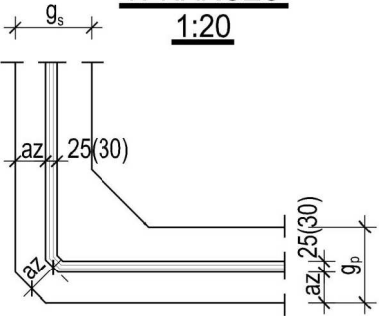

Max. grubość nadsypki

Typ	H _n
300x300	5,0 m

PRZEKROJ POPRZECZNY

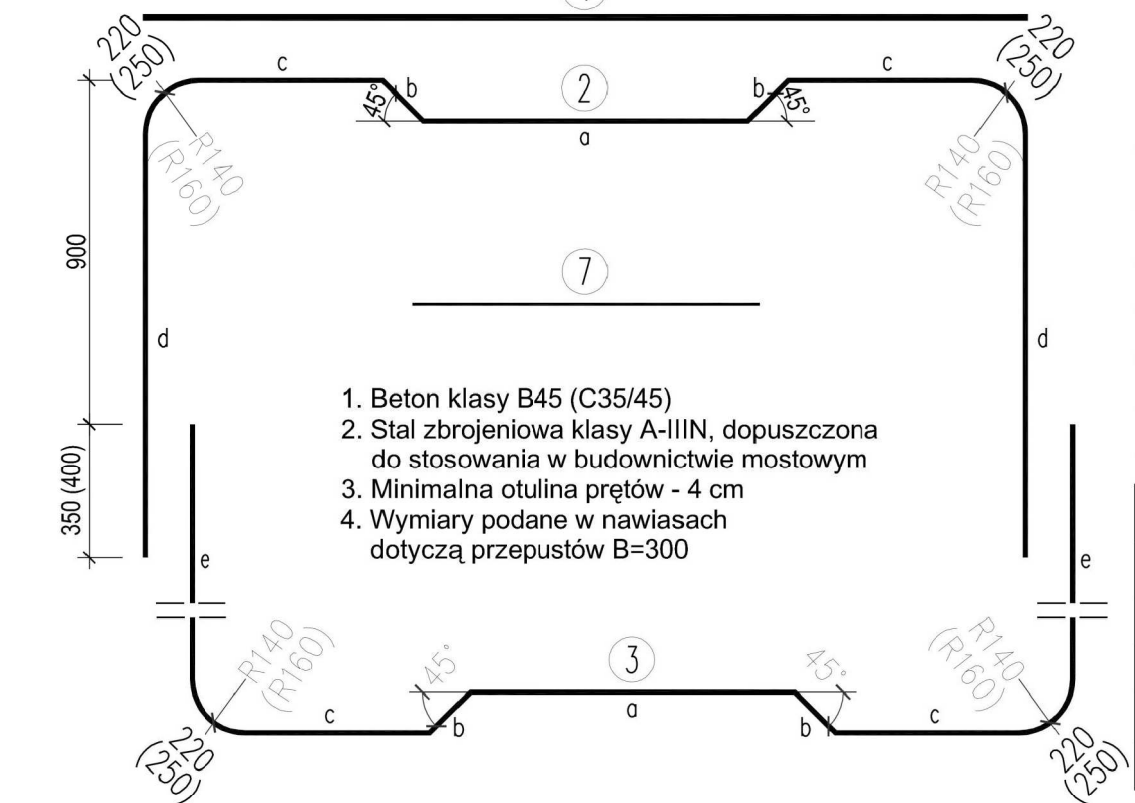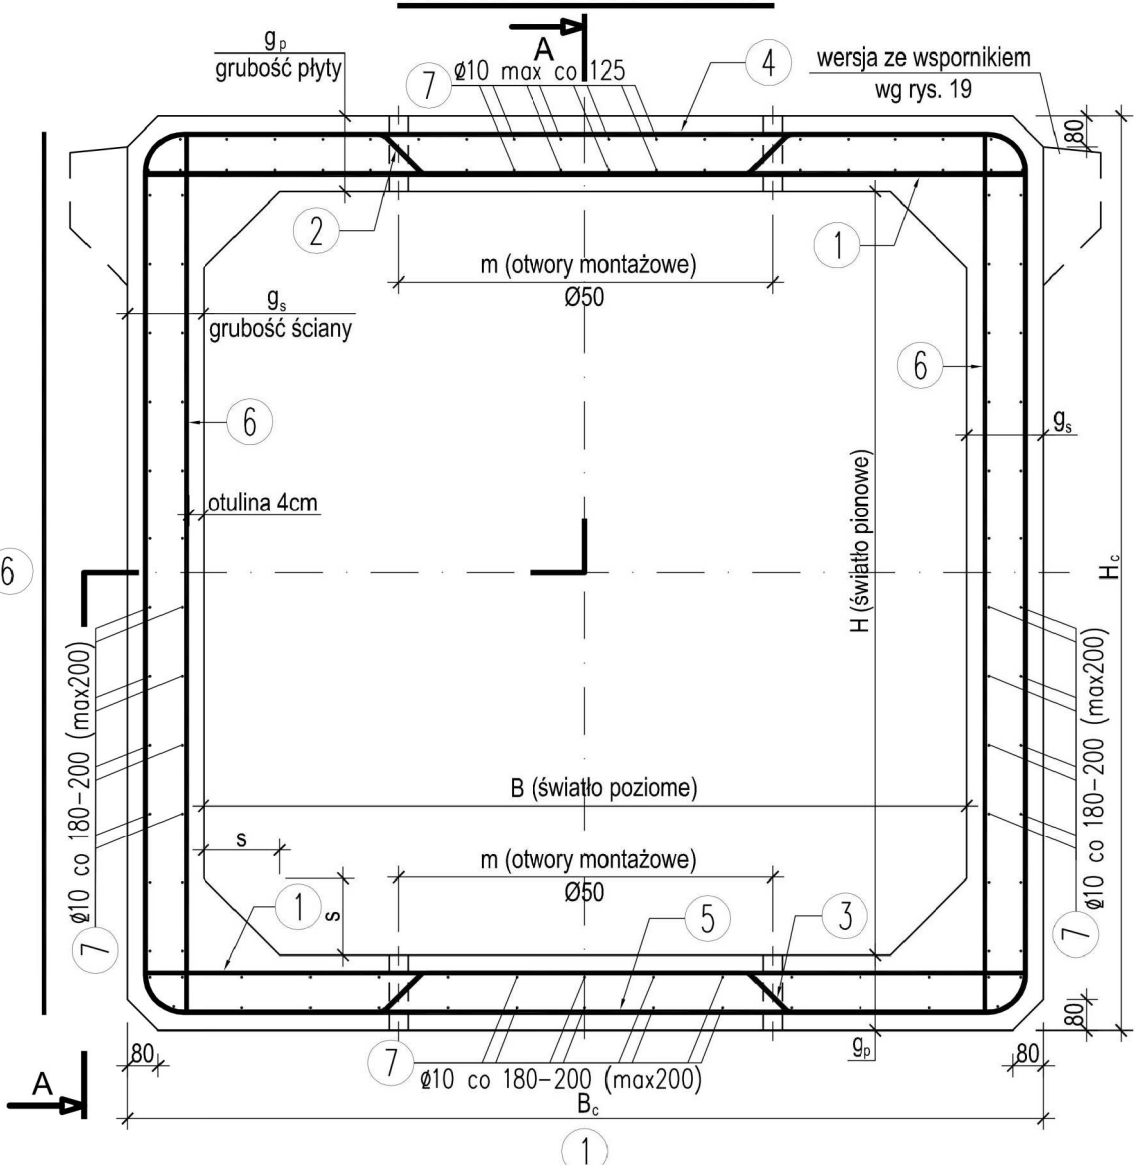

Długości prętów zbrojenia elementu L_c=990mm

Typ	1	2	a	b	c	d	3	e	4	f	g	5	h	6	7
300x300	3420	5990	1650	215	565	1140	8400	2345	8295	3125	2365	5785	1110	3420	910

Zbrojenie elementu L_c=990 Klasa A i STANAG 150

Typ	1	2	3	4	5	6	7	G _s
300x300	Ø20/10szt	Ø16/5szt	Ø16/5szt	Ø14/5szt	Ø14/5szt	Ø14/20szt	Ø10/164szt	458kg